


Vapor Tight Lighting

YML-1VT01 Series

Models passed DLC listed:
YML-1VT01-42, YML-1VT01-60




Applications


Parking Lots, Garages, Gas Stations, Corridors, Schools, Shopping Malls, etc.

- Efficiency of chips: 170-200lm/w
- LENS: Optical grade PC, anti-UV oxidation.
- Beam Angle: 130°
- Input voltage: 120-277 VAC, 50/60 HZ
- LED driver: constant current, efficiency is up to 92%, PF ≥ 0.95.
- IP class: IP 65

Dimension [Inch(mm)]

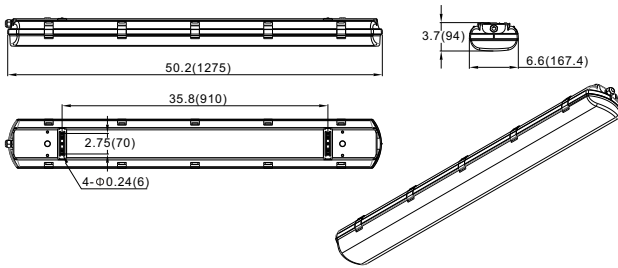

Distribution Curve Flux



Ordering Information

Example: YML-1VT01-32-850-130-1

Company code	Voltage	Type	Power	Ra	Colour Temp.	Optic	Options
YML	1 120~277VAC	VT01	32 (32W 3968Lumens) 36 (36W 4375Lumens) 42 (42W 4980Lumens) 50 (50W 6144Lumens) 60 (60W 6988Lumens)	8 80	30 3000K 35 3500K 40 4000K 50 5000K	130 130°	1 0~10V dimming